



Gyproc[®] Regular Board



Gyproc® Regular Board

Gyproc® Regular Board

Application

For the use in conjunction with internal ceilings and walls

Performance

- Quick and easy to install
- Health and environmentally friendly
- Improve sound insulation when applied in the system



Technical Information

Workability

- Lightweight
- Quick and easy installation

Thermal Insulation

- Thermal resistance value (R) between 0.06-0.1 sq.m.K/W (depending on thickness)

Aesthetic Properties

- Highly flexible in creating the highest standards of design
- Easily decorated with paint, tiles, wallpaper etc.

Product Information

Gyproc® Regular Board

Thickness

- 9 mm
- 12 mm
- 12.5 mm
- 15 mm
- 15.9 mm

Edge Type

- Recessed Edge (RE)
- Square Edge (SE)



Nominal Size

- 1200 x 2400 mm
 - 1220 x 2440 mm
- other sizes are available, please contact Customer Service

Production Standard

- ASTM C1396
- BS EN 520
- ISO 9002
- ISO 14001
- CNS 6532,
- TIS 219-2552

Gyproc® Regular Board

Practical space saving family solutions for your home.

Gyproc® Regular Board is a standard gypsum board with ivory face paper, suitable for most applications where normal fire, structural and acoustic performance are specified.

Gyproc® Regular Board is non-combustible and has superior thermal insulation, is smooth and level, giving a beautiful appearance ideal for interior walls and ceilings.

Made from natural gypsum, Gyproc® Regular Board is produced leading edge technology with high quality and international standards recognition.



SITE PRODUCTIVITY GAIN



ENVIRONMENTALLY FRIENDLY




INSPIRING SPACE



Gyproc® Regular Board


GypWall™ System

GypWall™ System is drywall partition system which is lightweight, non-loadbearing and quickly assembled on site. It provides cost effective wall solutions suitable for all types of buildings.

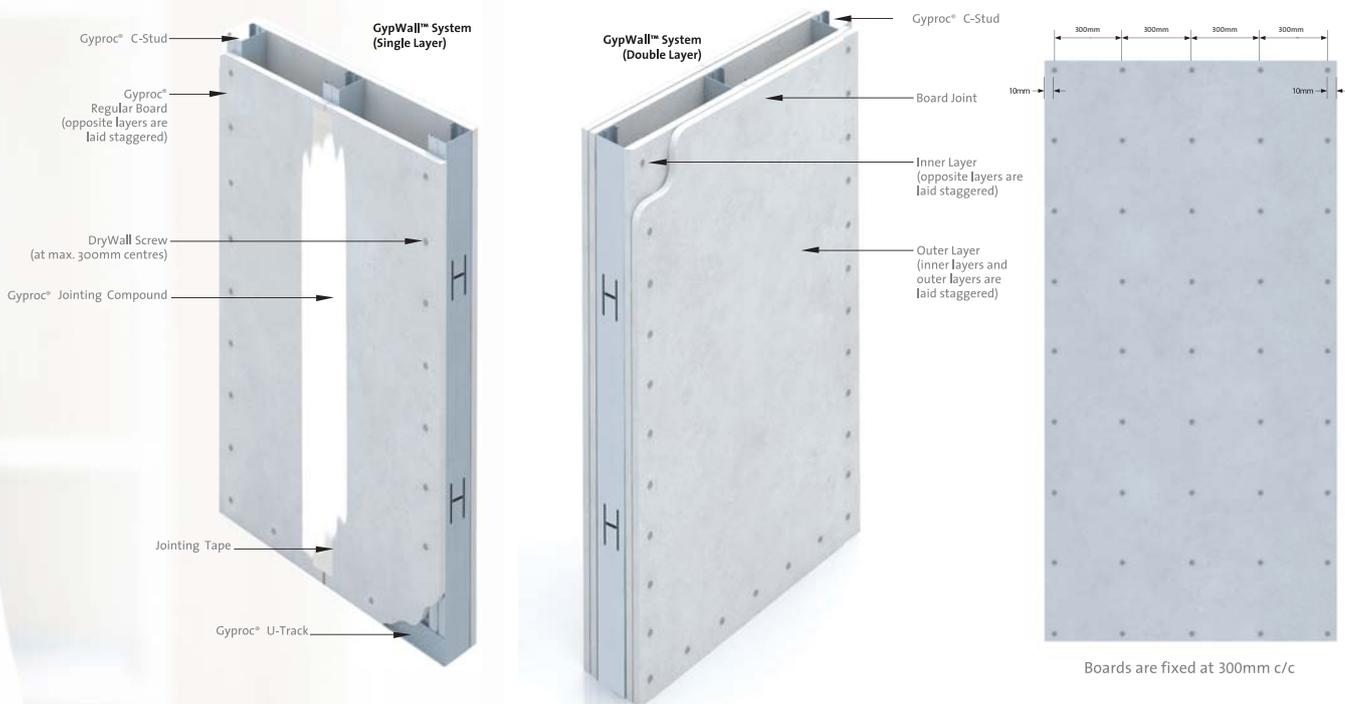

Recommended Height and Sound Insulation (STC) of each GypWall™ System

GypFrame C-Stud	1 x 12.5 mm		1 x 15 mm		2 x 12.5 mm		2 x 15 mm	
	Max Height (mm)	STC (dB)						
49S50	2500	33	2800	37	3400	43	3700	46
62S50	3200	35	3400	38	4100	44	4400	47
74S50	3600	35	3800	39	4600	44	4900	48
92S50	4500	36	4700	39	5700	46	5900	49
150S50	6200	38	6500	42	7600	48	7900	51

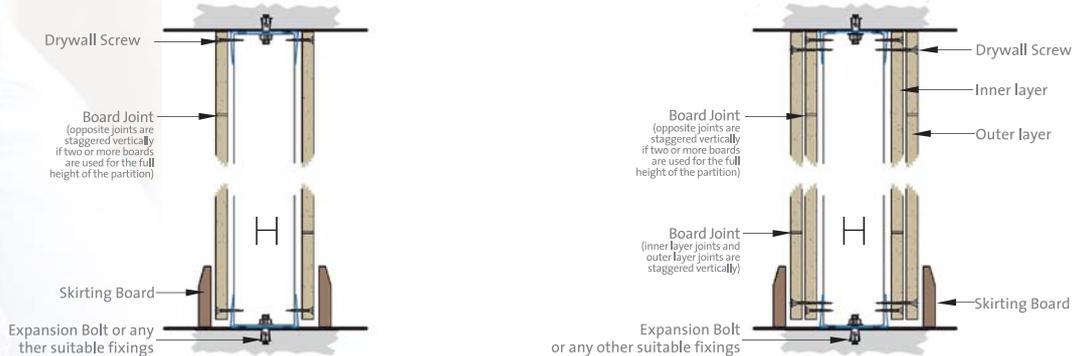

Gyproc® Regular Board Drywall System



Gyproc®
Regular
Board

Insulation

GypFrame™

Gyproc®
Jointing
Plaster

Gyproc®
Cornerbead
for edge
projection


Gyproc®
Cotton
Tape

GypWall™
System

Gyproc® Regular Board


DriLyner™ System

DriLyner™ System provides simple and effective techniques for fixing Gyproc® plasterboard to bricks, blocks, concrete or sand/cement walls.

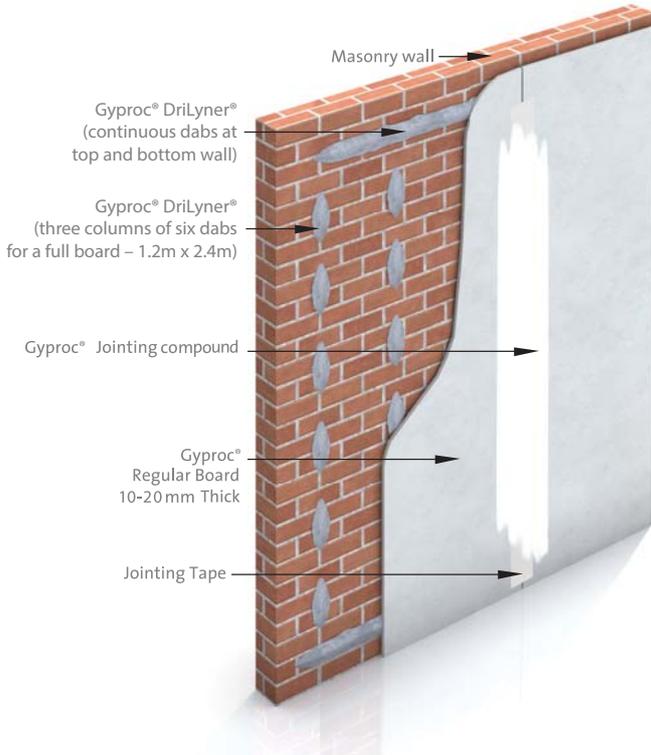

GypLyner™ Wall System



GypLyner™ System is a cost-effective, virtually independent metal frame dry lining. It readily facilitates the incorporation of services.

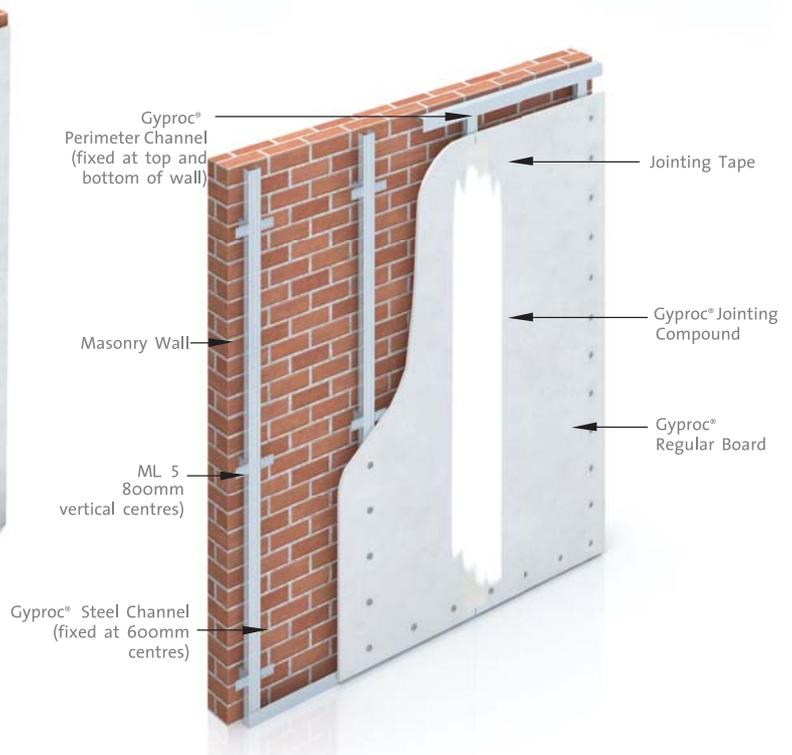

Ceiling System

CasoLine™ Wall System

CasoLine™ Concealed Ceiling System is a concealed suspended system that gives a beautiful, homogeneous appearance, smooth finish without visible joints.

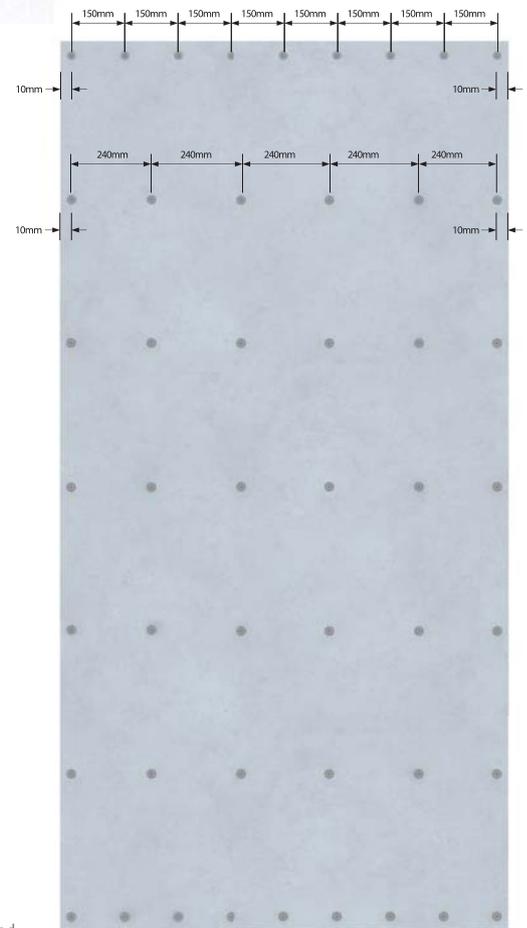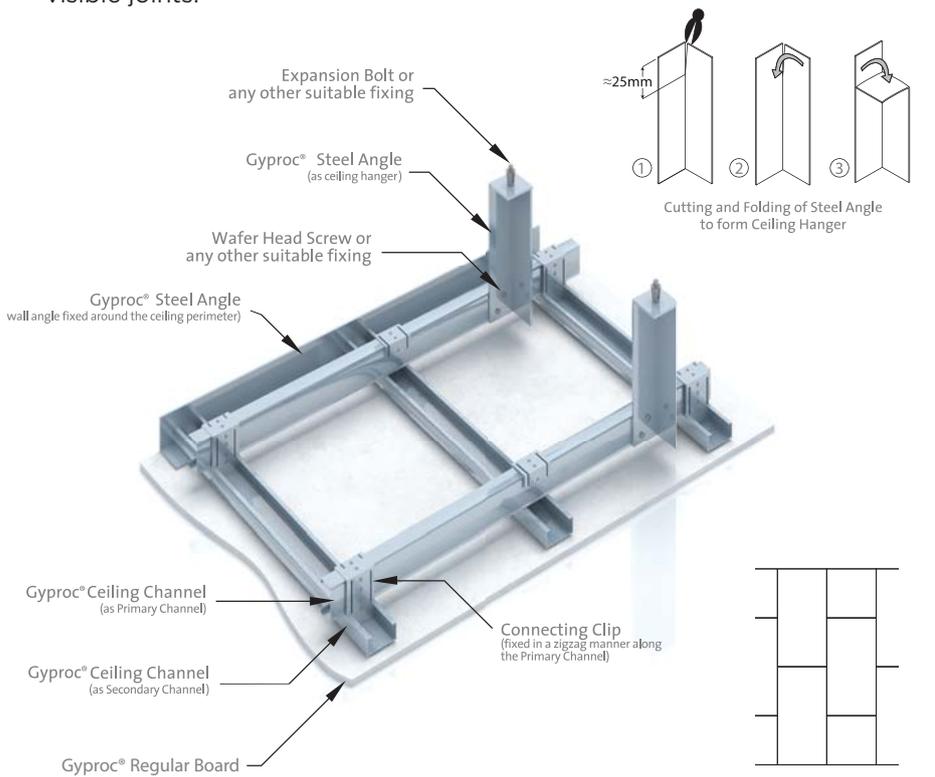



MAIN OFFICE

20 Fortune Avenue, corner Santan Street
Brgy. Fortune, Marikina City, PH 1809
Phone: (632) 87901000
Email: info@worldhomedepot.com

DAVAO OFFICE

Unit 1&2 Tristar Warehouse, KM11 Brgy.
Communal Diversion Rd., Davao City, PH 8000
Phone: (082) 2340911 to 14
Email: info.davao@worldhomedepot.com