


ARMSTRONG OPTRA FG

- Suitable for open space & large circulation area requiring specialist acoustical performance
- Made from lightweight soft fiber with fully painted surface and edges.
- Customizable sizes & finishing available by request
- High light reflective finish for brighter space
- Humiguard Plus® (RH95) Performance

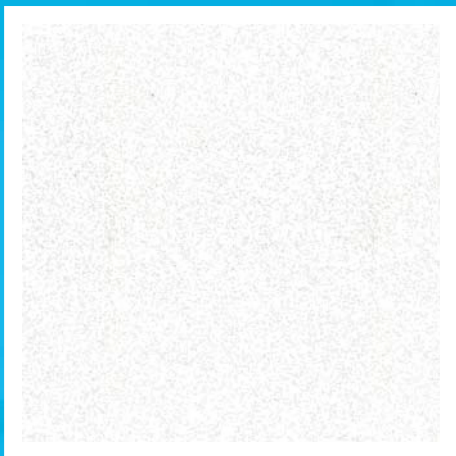

ARMSTRONG OPTRA FG

Panel Options	Board		Tegular 24		Tegular 15		SL2 / K2C2
Edge details	 24mm Tee Grid		 24mm Tee Grid		 15mm Tee Grid		 24mm Tee Grid
Thickness (mm)	15mm	20mm	15mm	20mm	15mm	20mm	20-25mm
Dimensions (mm)							
600 x 600	G600W060615	G600W060620	G600W060615TL	G600W060620TL	G600W060615ML	G600W060620ML	Available upon request
1200 x 600	G600W061215	G600W061220	G600W061215TL	G600W061220TL	G600W061215ML	G600W061220ML	Available upon request
1200 x 1200	-	G600W121220	-	G600W121220TL	-	G600W121220ML	Available upon request
System	24mm exposed grid systems fully demountable		24mm exposed grid systems fully demountable		15mm exposed grid systems fully demountable		24mm exposed grid systems fully demountable
Weight	1.88 – 2.38 kg/m ²						
Colour	Global White (Black & RAL Colour available by request)						
Sound absorption	NRC 0.90 (15mm) / 0.95 (20mm)						
Sound attenuation	≤ 26 dB						
Fire reaction	CLASS 0/1 based on BS 476 Part 6 & 7						
Light reflectance	≤ 85%						
Thermal conductivity	$\lambda = 0.052 - 0.057 \text{ W/mk}$						
Humidity resistance	RH95						
Cleanability							
Sustainability	 Knauf Armstrong provides the widest range of products that have been third party tested and certified by industry leading Eco-classification 85%						



SCAN & EMAIL ME

MAIN OFFICE

DAVAO OFFICE